

Acoustic Clamp


GRIPPLE®

Acoustic Clamp - Den mest tysta rörklamman på marknaden.


Idealisk för VVS och ventilation på t ex sjukhus, teater och andra byggprojekt som kräver ljudstyrning.

FÖRDELAR


- Akustisk reduktion upp till 23 dba
- Levereras med förskuren gummislang för förbättrad akustisk prestanda
- Upp till 6 gånger snabbare än traditionella metoder
- För rörstorlekar från yttermått Ø 17 mm till 600 mm
- Enkel lagring på plats
- Passar M8 & M10
- Kan levereras i kit med Gripple Low Profile Brackets eller Universal Brackets

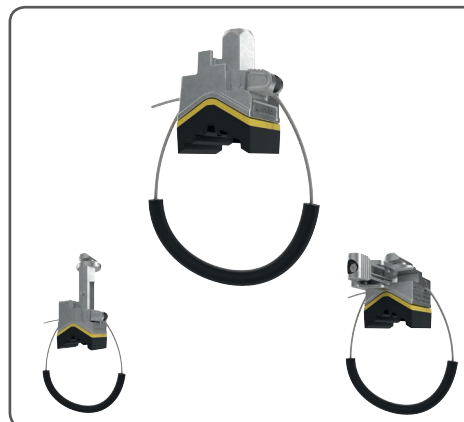


INSTALLATION

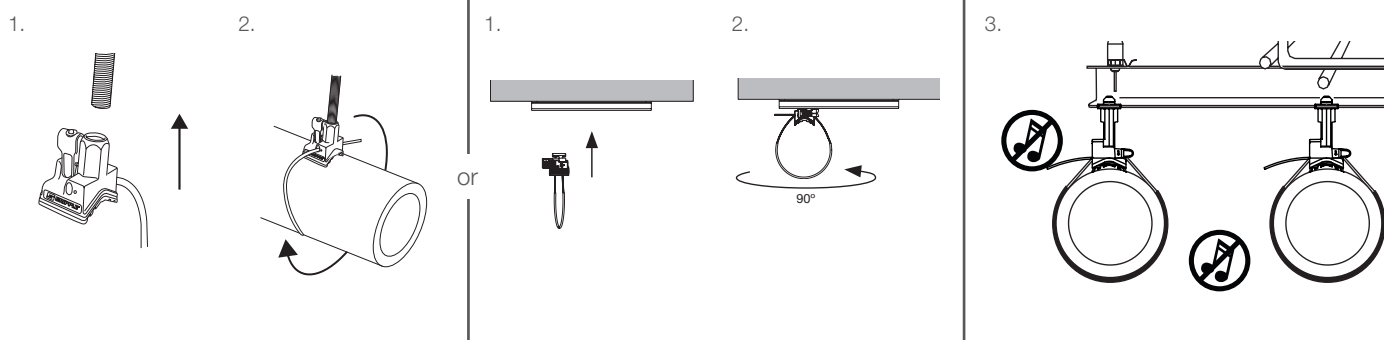


SPECIFIKATION

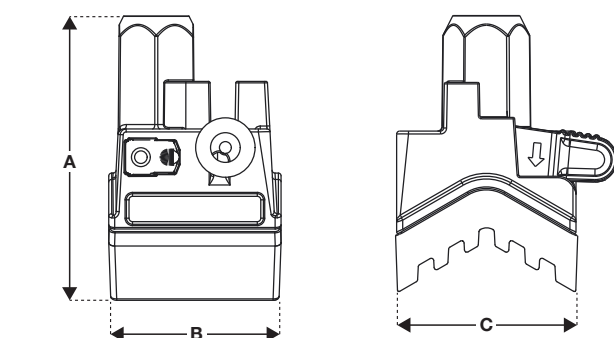

Dimension	Size (mm)
A	48
B	29
C	29,5
D	Ø 5
E	Ø 10
F	80



Tillgängliga Konsoler

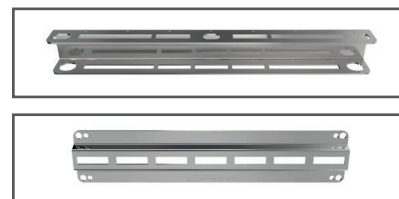

Konsoler finns i olika storlekar.
För mer information, se www.gripple.com

TEKNISK INFORMATION

Laster:

75 kg @ 3:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel
hardened till min. 56
Rockwell C

Spring - Stainless Steel
(Type 302)

Pad - EPDM 4015 Shore A

Rubber Sleeve - EPDM
4015 Shore A

Godkännanden:

Lloyds certified

IGN sound level testing
conducted by Fraunhofer
institute for building
physics

TÜV tested

APAVE tested

PI-ACOUSTICCLAMP-ENG-EU

www.gripple.com

Gripple's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Gripple Europe SARL | 1, rue du commerce | BP 37 | 67211 Obernai Cedex | France
Tel. +33 (0)3 88 95 44 95 Fax +33 (0)3 88 95 08 78 email frinfo@gripple.com